

+ Plasticolors® FLV

Pigment Dispersions for Epoxy, Phenolic, and Polyurethane Applications

The FLV Series colorants have been formulated for use in epoxy, phenolic, and polyurethane applications. The rheological profile of the FLV Series yields a product line with superior handling properties when compared to many other colorants based on 100% solids epoxy or polyol resins.

► Key Benefits

The FLV Series pigment dispersions consist of organic and inorganic pigments milled in a proprietary system. The stabilization method was chosen to ensure broad compatibility in multiple resin chemistries as well as long-term viscosity and colorant stability. The primary stabilizer contains a high level of bio-based components making this line more sustainable than other colorant lines.

Colorants based on epoxy resins will increase in viscosity over time. The FLV Series is viscosity stable for up to 2 years. There will be no solidification or gelling during storage and no crystallization will occur. The colorants can be used at temperatures above 30° F (-1° C). Below this temperature, the colorants can freeze. The colorants have been tested for freeze/thaw stability up to four cycles with no negative impacts exhibited.

These colorants are also formulated at maximum pigment loading to limit most effects on the final system properties.

► Properties

The FLV Series colorants offer the coatings formulator a product line with low VOC levels, excellent pigment development, and good performance characteristics. The tint strength of these colorants is controlled to ± 2%. Color difference is also controlled to ensure lot-to-lot consistency.

The viscosity range of these colorants is 60 - 80 KU (70 - 120 KU for the white colorant). This range makes these colorants suitable for machine dispensing.

The colorants are formulated to have a thixotropic characteristic. The thixotropy of each colorant aids in pigment suspension where there is very little to no settling of the pigment even at higher storage temperatures which leads to excellent shelf stability.

The primary stabilizer in the FLV Series has an epoxy equivalent weight of approximately 213. This value is in the range of systems containing epoxy resin and glycidyl esters.

► Compatibility

- Epoxy Resins*
- Phenolics
- Polyurethanes


► Applications

Applications include, but are not limited to, automotive, aerospace, energy, and architectural.

► Handling and Storage

Proper handling is essential to maintain good quality. Containers should be tightly sealed when not in use. This will prevent the absorption of atmospheric moisture and minimize the chance of airborne contamination. Containers should be stored in a manner as to protect them from temperature extremes (0-45°C, 32-120°F). It is recommended that the containers be mixed prior to use. Shelf life of the FLV colorants is 24 months from the date of manufacture in unopened containers. Reference the MSDS for more product care information.

* The use of high levels of diluents in epoxy systems may lead to color control issues related to flocculation or color float.

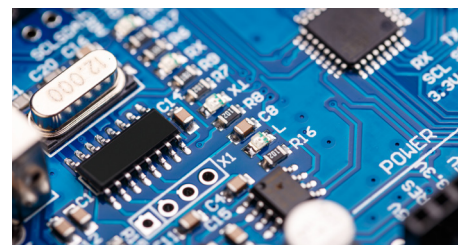

Product Code	Description	CI Name	Pigment Wt. %	Specific Gravity	Pigment Lightfastness ¹		Pigment Weatherfastness ²	
					Full	Tint	Full	Tint
FLV-020070T	Carbon Black	PBk 7	21	1.06	8	8	5	5
FLV-020071T	Black Oxide	PBk 11	53	1.68	8	-	5	-
FLV-070123T	Red Oxide	PR 101	72	2.28	8	8	5	5
FLV-070124T	Organic Red	PR 170	19	1.02	6-7	-	3-4	2-3
FLV-070125T	Quinacridone Red	PR 19	25	1.04	7-8	7	4	3-4
FLV-10922T	Titanium Dioxide	PW 6	73	2.18	7-8	-	5	-
FLV-30782T	Phthalo Blue RS	PB 15:2	21	1.05	8	8	5	5
FLV-30783T	Quinacridone Violet	PV 19	26	1.03	7	7-8	-	-
FLV-50346T	Phthalo Green BS	PG 7	18	1.07	7-8	7	5	5
FLV-80977T	Yellow Oxide	PY 42	64	1.87	8	8	5	5
FLV-80978T	Organic Yellow	PY 151	14	1.01	6-7	6-7	-	-
FLV-80979T	Bismuth Vanadate GS	PY 184	68	2.24	7-8	-	4-5	-

Products listed represent standard single pigment colors. Standard ColorPak colors and custom color matched blends are available with special consideration for a variety of requirements, including color, outdoor durability, abrasion, and cost considerations. If a specific pigment chemistry or custom blend is needed, please contact Chromaflo Technologies.

NOTE: All fastness data is based on pigment supplier information and is given for guidance only. It is not an indicator of fastness in all applications, as many factors and components have a high level of influence over performance. It is the responsibility of the user to test and verify performance in their individual application.

(1) Light fastness is measured on an eight step blue wool scale, where 1=very poor light fastness and, 8=excellent light fastness.

(2) Weather resistance is measured on a five step gray scale, where 1= very poor weather resistance, 5= excellent weather resistance

©Chromaflo Technologies. This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.



Where Art Meets Technology