

+ Plasticolors® AM & PG Colorants

Chemical Thickener Dispersions for Polyester Molding

Plasticolors® AM and PG products are the most consistently reactive magnesium oxide dispersions available designed to deliver a specific controlled thickening response.

► Application

The AM products are based on magnesium oxide and the PG on magnesium hydroxide chemistry. These products are manufactured using a technology designed to enhance consistency and predictability of thickening for SMC, BMC and TMC systems.

► Properties

This thickener technology includes an innovative breakthrough in quality control methodology to assure consistent thickening performance of the magnesium oxide dispersions. This methodology is based on state-of-the-art rheological instrumentation, analysis and advanced interpretation. These design components work in synergy to assist compounders and molders with optimizing consistent thickening and controlling molding viscosity. Plasticolors AM and PG product details are available on the reverse side of this sheet.

► Packaging and storage

These thickener products are available in a variety of packaging.

Containers should be tightly sealed when not in use. This will prevent the absorption of atmospheric moisture and minimize the chance of airborne contamination. Containers should be stored in a manner as to protect them from extreme temperatures (0-45°C).


Material should be mixed prior to use if stored over 30 days. The Shelf life of the product is 12 months from the date of manufacture.

► Our services

Chromaflo Technologies Europe supplies pigment pastes and chemical dispersions in Europe, North Africa and the Middle East. Manufacturing and technical support is provided from our Maastricht site in the Netherlands.

Our technical professionals are available to support you with your inhibitor, thickening and color requirements. Our dedicated sales managers are your point of contact for any queries you have. Apart from direct contact with our sales managers, we have set up a broad network of distribution partners to enhance local support. A large palette of standard colors, custom color matched blends and toll manufacturing can be offered.

Contact us to learn more about our chemical dispersions and pigment pastes for your application. Information on the product portfolio in other regions can be provided on request.

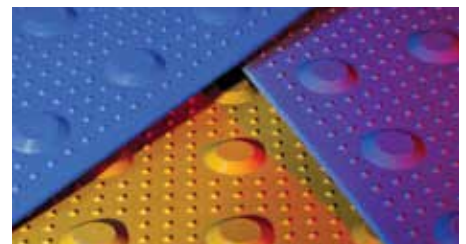



Product Code	Chemistry	Viscosity cps	Reactivity Index (*)	Density kg/m ³	Color
AM-90762/25	MgO	6.000-12.000	0.90-1.15	1600-1900	Neutral
AM-90763/35	MgO	8.000-18.000	0.90-1.15	1600-1900	Neutral
AM-90763/35 FC	MgO	8.000-18.000	0.95-1.05	1600-1900	Neutral
AM-90763/35 LV	MgO	9.000-11.000	0.85-1.15	1600-1900	Neutral
AM-9033	MgO	8.000-18.000	0.90-1.15	1380-1620	Neutral
PG-90769	Mg(OH) ₂	10.000-20.000	0.90-1.15	1650-1950	Neutral

(*) The Reactivity Index is determined per batch in comparison with the standard (Reactivity Index = 1)

Other liquid thickeners are available upon request. Please contact Chromaflo Technologies to discuss your requirements.



Where Art Meets Technology

CHROMAFLO.COM

©Chromaflo Technologies. This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.